

Heavy Lifting

Engineered Synthetic Sling Solutions



Lifting Specialists

Cortland lifting slings allow operators to rig and lift in less time, maintaining operational safety and less damage to equipment

When trying to meet the technical lift specifications of larger and more challenging lifts, synthetic lifting solutions surpass traditional steel wire sling solutions through strength, weight, handling, and storage efficiencies.

As an originator of fiber braiding technology, we have more than 25 years of experience engineering certified synthetic lifting sling solutions. We are the only fabricator offering the combination of both rope and round slings to offer the best lifting package solution for each application.

The challenges are to understand the critical areas of the lift, and then to design the solution correctly. Our success is based on a complete engineering package, involving:

Client Interface Our engineering team can assist or lead discussions in selecting an appropriate product to ensure an optimal solution is reached.

Product Knowledge Our engineering team has in depth knowledge of the various material properties and all the associated benefits and restrictions of each designed and manufactured product.

Design We have the engineering capability to assess an application and design a custom synthetic fiber solution or modify an existing product to suit individual or specialized applications.

Lift Studies Cortland has the engineering capability to conduct lift studies and analysis to determine the requirements of a rope or sling for turnkey solutions.

Whether your need is lifting and/or lowering lines, tow or recovery solutions, deep water installation slings or slings with high vertical hitch MBL, we can engineer a synthetic solution to match the specific needs of your project.




Synthetic Fiber Solutions

Custom solutions to meet every aspect of the load you need to lift, and the safety of the team below



Fiber vs. Steel

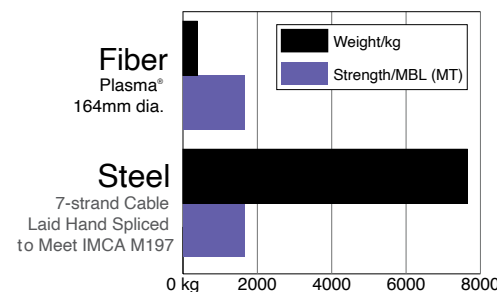

Over the last decade synthetic high performance ropes and slings have become a critical lifting component, replacing steel wire rope.

Modern, high strength synthetic fibers are remarkably durable and will not rust or corrode. They are not affected by salt or fresh water, and wear points can be protected from abrasion, cutting and heat damage. They are also easy to inspect and repair.

Lightweight fiber lifting slings offer significant reductions in rigging time and manpower. They are 86% lighter than steel wire rope, and offer superior flexibility which translates into fewer rigging injuries. They are also soft on hands offering a safer solution for riggers and expensive payloads. In heavy lift projects, installation crews also receive savings in transportation and storage costs.

Benefits of Fiber vs. Steel:

- Lighter and easier to handle
- Minimal set-up costs
- Faster turnarounds
- Reduced risk of injury
- Reduced total costs
- Low maintenance
- Works well on winches
- Easy to splice

Testing Services

- Max tension/tension and break load 5872kN
- Full capacity testing from 24" (610mm) to 177ft (54m) overall length
- 200HP pump offers full capacity cyclic RAM speed of 44 IPM
- Fully comply with all relevant legislative and internally recognized testing standards

Cortland's synthetic products have been instrumental in improving operational efficiency and safety in a diverse range of critical operations. To help customers safely manage through the lifecycle of these products, we work closely with clients to better understand long term use and retirement criteria.

Inspection and recertification services

Cortland offers inspection, proof loading, and destruction testing capabilities at our facilities in the USA.

Services focus on destructive testing and recertification of synthetic fiber ropes and slings up to 1.3 million pounds (589t). Test equipment offers a 14 foot (4.2m) stroke to accommodate testing of a broad range of products. In conjunction with tensile testing, we have the capability to conduct tension-tension fatigue testing up to full machine capacity thanks to high fatigue rated components.

Cortland synthetic fiber slings adhere to all key global standards. All slings are tagged appropriately and backed by extensive process control documentation. Engineered and proof-loaded to meet precise length tolerances, Cortland slings use secure construction with efficient splice terminations. Our slings are also available with innovative integrated hardware solutions.

Selantic® slings provide very low elongation, precise length tolerances, and high strength performance

High performance Selantic® slings and interfacing hardware have been supplied to the heavy lift industry since 1993. They provide a safe, reliable, cost-effective and lightweight alternative to heavy chains and wire rope.

Selantic slings from Cortland are endless loop grommets made of a parallel laid synthetic fiber construction with a protective jacket over the body, and a heavier jacket construction in the eye (because of the grommet construction, the eyes are artificial). Selantic slings can be made as short as one meter and still achieve 3000 Te MBL; and they are torque-neutral, with no tendency to rotate under load (if rotation occurs, little strength loss is experienced). Because of their construction they have virtually no bending stiffness, providing storage efficiencies.

These slings are made of materials specific to your application. We carefully select the optimal core material based on our experience and your application requirements. These core materials include UHMWPE, and Aramid fibers (e.g. Technora®, Dyneema®, and Spectra®). To protect potential chafe areas from wear, the core material is encased in a protective cover to ensure a durable and long-lasting lift solution. We also offer specialty compliant hardware engineering services, including thimbles, shackles, hooks and spreader bars.

Specifications:

materials:	Aramid, UHMWPE or blends
construction:	Parallel laid endless loop filaments
jacket:	Cordura® cut resistant cover, and special design wear protection in critical areas
capacity:	1 to >2000 Te MBL
length:	0.8 to 88m
length tolerance:	+/- 0.25% of nominal length and 0.1% between matched pairs
certifications:	DNV, CEN and ILO



For Precision Lifts

Advantages:

- Stiffness optimized slings for each leg
- Ability to produce short lengths
- High strength efficiency, yet lightweight
- Possibilities for project specific bending radiuses
- Small length tolerances
- Protective jacket solutions, offering durability and visibility features
- Industry accepted tagging
- Easy to handle, store, and transport
- Custom design per application, including hardware if necessary

Applications:

- Surface overhead crane lifting (below the hook):
- Wind farm installation; towers, nacelles, monopiles, transition pieces (TP)
 - Industrial material movement or transfer; power turbines, etc.
 - Shipyards
 - Precision lifting
- Subsea Lifting:
- Subsea installation of suction piles, anchors, support structures, manifolds, buoys
 - Load transfer and pull-in operations


Plasma® 12x12 braided construction creates strong lifting slings that are perfect for long length lift situations

Cortland's Plasma® rope is strong enough for very heavy lifts yet durable enough for repeated use. Our exclusive Plasma technology processes UHMWPE fibers into maximum strength efficiency. These fibers are then braided into a torque-free rope which is firm, yet flexible, and offers the ability to produce very long lengths. Utilizing the largest 12-strand braider in the world, Cortland can produce large diameters (up to 200mm) and long lengths.

Unlike wire ropes and jacketed round slings, Plasma 12x12 rope slings are easy to inspect. If repair is needed, the 12x12 construction offers the ability to replace worn strands. Plasma 12x12 rope slings are also neutrally buoyant, and do not absorb water, so there is no reduction in lifting capacity once immersed. These slings are popular in offshore crane lifting systems because of their light weight and ease in handling.

Specifications:

materials:	Plasma® UHMWPE (other high modulus synthetic fibers available such as Aramid or LCP)
construction:	12x12 torque-free braid
chafe protection:	Braided or narrow woven options available
capacity:	Nominal diameter sizes up to 200mm
	• Eye-to-eye vertical hitch—up to 2233t MBL
	• Grommet vertical hitch—up to 3685t MBL
length:	Unlimited long lengths – short lengths dependent on size
length tolerance:	As low as +/-0.25% of nominal length
certifications:	All standards

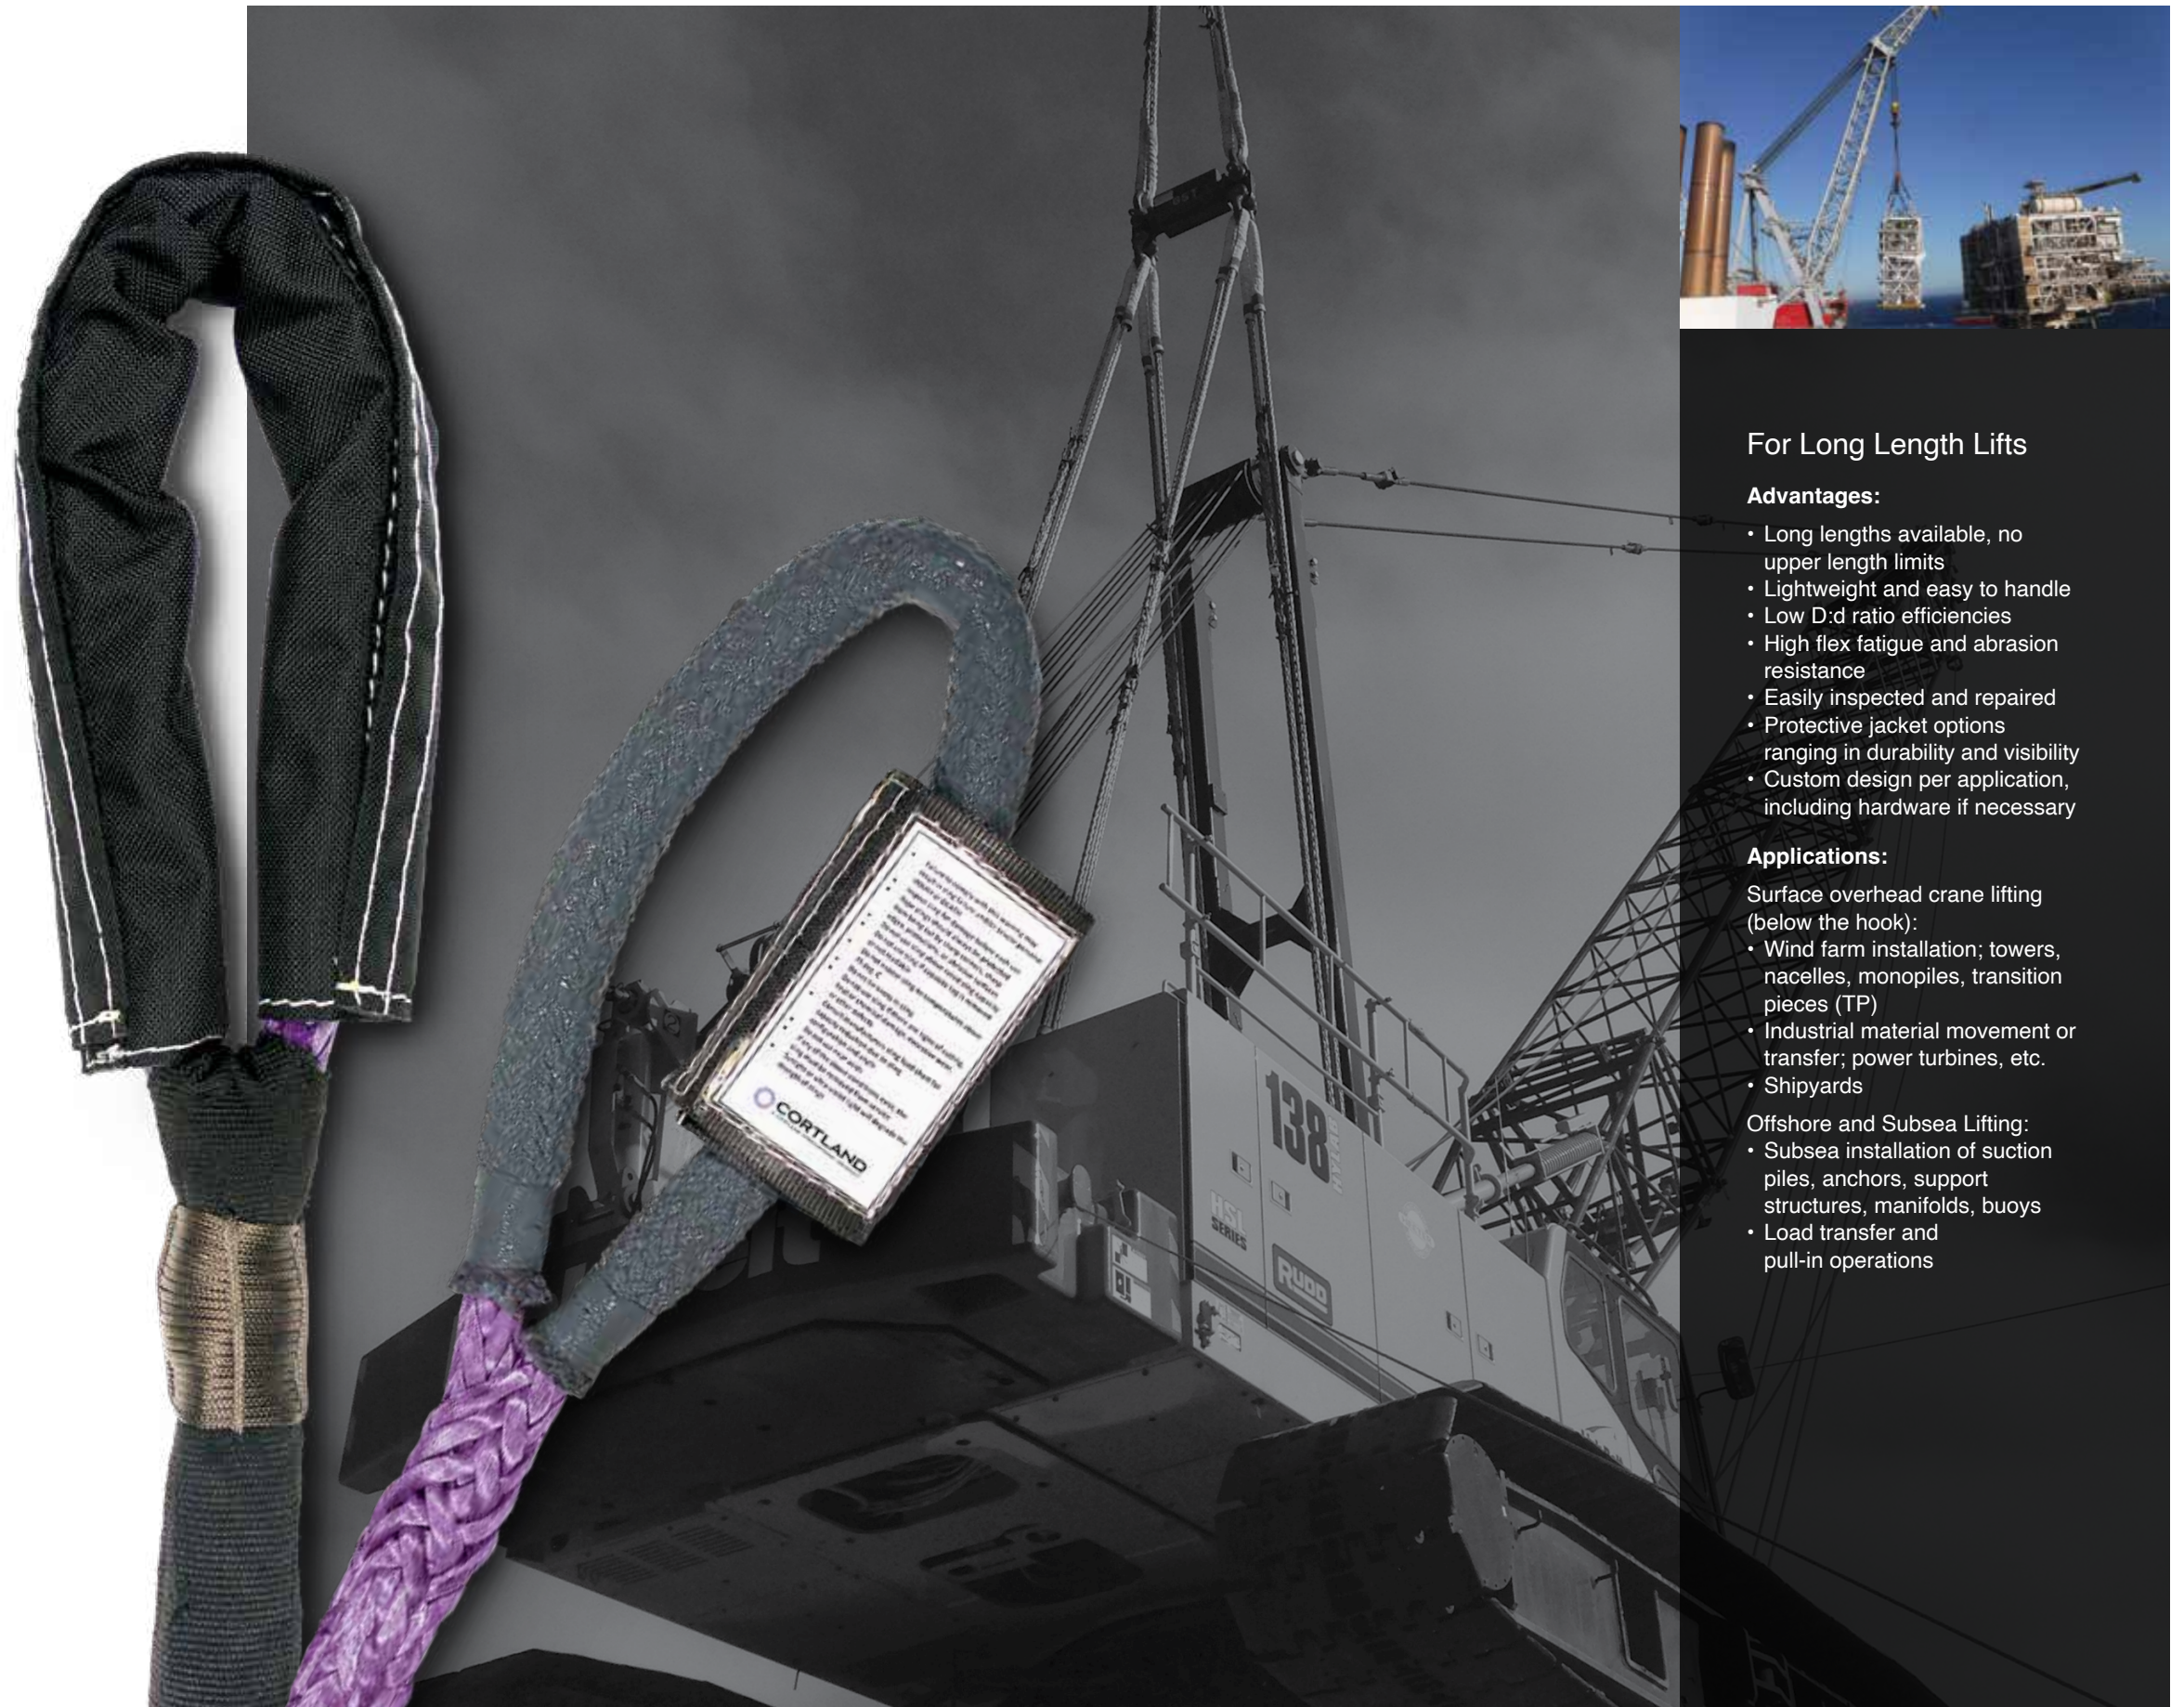

For Long Length Lifts

Advantages:

- Long lengths available, no upper length limits
- Lightweight and easy to handle
- Low D:d ratio efficiencies
- High flex fatigue and abrasion resistance
- Easily inspected and repaired
- Protective jacket options ranging in durability and visibility
- Custom design per application, including hardware if necessary

Applications:

- Surface overhead crane lifting (below the hook):
- Wind farm installation; towers, nacelles, monopiles, transition pieces (TP)
 - Industrial material movement or transfer; power turbines, etc.
 - Shipyards
- Offshore and Subsea Lifting:
- Subsea installation of suction piles, anchors, support structures, manifolds, buoys
 - Load transfer and pull-in operations

Selantic® Round Slings

Custom Designed

Each Selantic® sling is custom designed for the intended application.

Core Construction

Selantic slings are endless loop grommets made of a parallel laid synthetic fiber construction.

Protective Covers

The selected core material is encased in a protective cover to ensure a durable and long-lasting lift solution. Heavier wear protection are used in the eyes.



Selantic slings can be made as short as one meter and still achieve >1000 Te MBL.

Selantic slings are torque-neutral, with no tendency to rotate under load (if rotation occurs, little strength loss is experienced).

Specialized Hardware

Cortland offers specialty compliant hardware engineering services with all products. Thimbles, shackles, hooks and spreader bars can all be custom engineered into the initial sling design.

The below slings are available as standard but each sling is custom-designed and manufactured according to customer's requirements. They are available in lengths varying from short (0.8m) up to 88m, with different characteristics according to the intended application.

Selantic® Sling Chart

Part No	Minimum Breaking Load MBL		Minimum Bend Diameter		Sling Eye Diameter		Est. Weight in air	
	lbs	Te	in.	mm	in.	mm	lbs/ft	kg/m
SD35	77,180	35	1.5	37	1.5	37	0.47	0.70
SD50	110,250	50	1.6	41	1.7	43	0.62	0.92
SD75	165,380	75	1.8	46	2.0	52	0.84	1.26
SD100	220,500	100	2.0	51	2.3	58	1.06	1.58
SD150	330,750	150	2.4	62	2.7	68	1.48	2.20
SD200	441,000	200	2.8	72	3.0	76	1.92	2.85
SD300	661,500	300	3.6	92	3.6	91	2.69	4.01
SD400	882,000	400	4.4	111	4.0	102	3.49	5.20
SD500	1,102,500	500	5.1	129	4.3	110	4.31	6.42
SD750	1,653,800	750	6.8	172	5.1	130	6.28	9.34
SD1000	2,205,000	1000	8.2	209	5.7	145	8.32	12
SD1250	2,756,300	1250	9.5	241	6.2	158	10	15
SD1500	3,307,500	1500	10.6	268	6.7	169	12	18
SD1750	3,858,800	1750	11.4	290	7.1	182	14	21
SD2000	4,410,000	2000	12.1	308	7.6	193	16	25
SD2250	4,961,300	2250	12.6	321	8.0	202	19	28
SD2500	5,512,500	2500	13.2	336	8.2	209	21	31
SD2750	6,063,800	2750	13.8	350	8.6	219	23	34
SD3000	6,615,000	3000	14.3	364	8.9	226	25	37
SD3250	7,166,300	3250	14.8	377	9.3	235	27	41
SD3500	7,717,500	3500	15.4	390	9.5	241	29	44

Your Specifications

When ordering, please provide us with as much information as possible to ensure that we provide you with the most cost-effective solution. For example, is heat or chemical resistance an issue? Would it be advantageous for the sling to have a high visibility jacket for subsea applications? Are special friction resistant wear pads required? How will the sling interface with other lifting components? Given this information, we will design, manufacture and deliver exactly the right solution for your needs.

Rope Lifting Slings

Cortland braided rope slings will outlast and outperform synthetic fiber round slings, standard or high performance.

There are many unique ways to fabricate rope into slings, two common methods are:

- single leg (eye-and-eye)
- endless loop (grommets)

Be sure to select the proper sling strength and fabrication configuration for the application.

All Cortland rope slings are proof loaded to 2x rated capacity.



Correct choice of rope lifting sling requires a good understanding of strength, durability, contact lifting points and other possible factors which could affect the lifting sling. Considerations include:

- Bending fatigue or WLL rated capacity reductions due to connection points (D:d ratios)
- Length tolerances
- Hardware interfaces
- Temperatures greater than 149°F (65°C)

Wear protection can be provided to cover both eye terminations and/or body or portions of the sling body.

Cortland rope slings are manufactured in the USA and tag certified to meet all ASME B30.9 lifting standards (other certification standards met upon request).

Rope Sling Configuration

Just as important as selecting the right fiber and construction, selecting the correct configuration will further enhance the performance of any sling. There are two primary configurations for fiber rope slings:

- Eye and Eye
- Endless Grommet

Each configuration has its own features and benefits.

Eye and Eye Slings

When spliced into an eye and eye sling, UHMWPE will essentially act as a size-for-size replacement for a traditional steel wire rope sling in terms of strength. Each end is terminated using a Cortland-approved splice which becomes locked in place after proof load testing.

Due to the splice length and free span requirements as shown in the drawing below, eye and eye slings have minimum length that must be considered. The sling can be made only so short due to the splices. Refer to minimum sling length column in the Sling Rating charts beginning on page 14.




- Minimum D:d ratio in the eyes is 1:1
- Minimum eye length must be 6x the bearing surface diameter or pin diameter, to maintain the vertex angle below 30°
- Rated capacity of eye-and-eye sling in a vertical pull includes splice efficiencies
- When basketing eye and eye slings the rated capacity will be affected when the basket point D:d ratio is less than 25:1

Endless Grommet Slings

Grommets are manufactured by splicing the ends of a rope together to form a continuous loop. Compared to eye-and-eye slings, they have increased strength with little to no increase in the chosen rope diameter due to two (2) legs holding the load. Alternatively, the same load can be held with a smaller rope diameter due to the two (2) legs holding the load.

The breaking strength of endless grommet slings is directly affected by the pin diameter on which they are mounted.

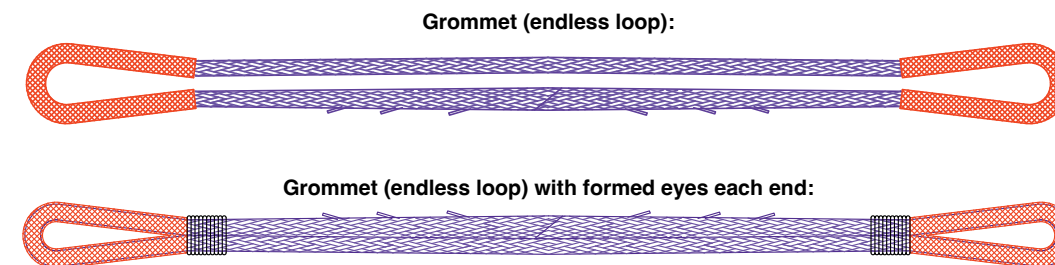


- Grommet sling rated capacity is directly related to the contact curvature on which it will be used
- Grommet sling ultimate strength is based on applying a configuration factor (CF) to the single leg strength to which the rope is made

Plasma® Rope Sling Rating Charts

Eye & Eye Sling Ratings—LBS

Vertical, choker and basket hitches
Basket hitch at varying angles

Ratings based on Design Factor of 5:1

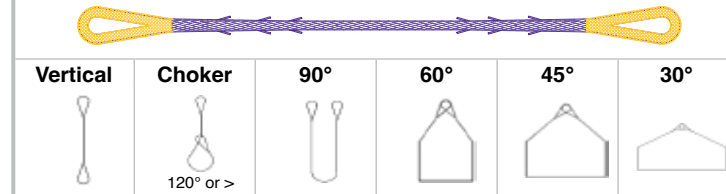

Nominal Size				Minimum Sling Length Ft/Inch	Sling Capacity Ratings at Work Load Limits (WLL) in Pounds Do Not Exceed WLL					
Dia. inch	Dia. mm	Circ. inch	MBL-pounds		Plasma® 12-Strand					
1/4	6	3/4	8,000	2' 1"	1,600	1,120	3,200	2,770	2,260	1,600
5/16	8	15/16	11,700	2' 5"	2,340	1,630	4,680	4,050	3,300	2,340
3/8	9	1-1/8	17,500	2' 8"	3,500	2,450	7,000	6,060	4,940	3,500
7/16	11	1-1/4	21,000	3' 0"	4,200	2,940	8,400	7,270	5,930	4,200
1/2	12	1-1/2	31,300	3' 2"	6,260	4,380	12,500	10,800	8,850	6,260
9/16	14	1-3/4	37,900	3' 6"	7,580	5,300	15,100	13,100	10,700	7,580
5/8	16	2	51,400	3' 10"	10,200	7,190	20,500	17,800	14,500	10,200
3/4	18	2-1/4	68,500	4' 4"	13,700	9,590	27,400	23,700	19,300	13,700
13/16	20	2-1/2	74,000	4' 7"	14,800	10,300	29,600	25,600	20,900	14,800
7/8	22	2-3/4	92,600	4' 11"	18,500	12,900	37,000	32,000	26,100	18,500
1	24	3	110,000	5' 5"	22,000	15,400	44,000	38,100	31,100	22,000
1-1/16	26	3-1/4	129,200	5' 8"	25,800	18,000	51,600	44,700	36,500	25,800
1-1/8	28	3-1/2	147,000	5' 11"	29,400	20,500	58,800	50,900	41,500	29,400
1-1/4	30	3-3/4	165,000	6' 6"	33,000	23,100	66,000	57,100	46,600	33,000
1-5/16	32	4	196,000	6' 10"	39,200	27,400	78,400	67,800	55,400	39,200
1-1/2	36	4-1/2	221,000	7' 7"	44,200	30,900	88,400	76,500	62,500	44,200


				Minimum Sling Length Ft/Inch	Sling Capacity Ratings at Work Load Limits (WLL) in Pounds Do Not Exceed WLL					
Dia. inch	Dia. mm	Circ. inch	MBL-pounds		Plasma® 12x12					
1-5/8	40	5	291,000	9' 1"	58,200	40,700	116,400	100,800	82,300	58,200
1-3/4	44	5-1/2	314,000	9' 10"	62,800	43,900	125,600	108,700	88,800	62,800
2	48	6	355,000	11' 0"	71,000	49,700	142,000	122,900	100,400	71,000
2-1/8	52	6-1/2	428,000	11' 7"	85,600	59,900	171,200	148,200	121,000	85,600
2-1/4	56	7	481,000	12' 4"	96,200	67,300	192,400	166,600	136,000	96,200
2-1/2	60	7-1/2	530,000	13' 6"	106,000	74,200	212,000	183,500	149,900	106,000
2-5/8	64	8	596,000	14' 1"	119,200	83,400	238,400	206,400	168,500	119,200
2-3/4	68	8-1/2	660,000	14' 8"	132,000	92,400	264,000	228,600	186,600	132,000
3	72	9	780,000	16' 0"	156,000	109,200	312,000	270,100	220,600	156,000
3-1/8	76	9-1/2	850,000	16' 7"	170,000	119,000	340,000	294,400	240,400	170,000
3-1/4	80	10	940,000	17' 2"	188,000	131,600	376,000	325,600	265,800	188,000
3-1/2	84	10-1/2	1,108,000	18' 6"	221,600	155,100	443,200	383,800	313,300	221,600
3-5/8	88	11	1,250,000	19' 1"	250,000	175,000	500,000	433,000	353,500	250,000
3-3/4	92	11-1/2	1,317,000	19' 8"	263,400	184,300	526,000	456,200	372,500	263,400
4	96	12	1,520,000	21' 0"	304,000	212,800	608,000	526,000	429,900	304,000
4-1/8	100	12-1/2	1,622,000	21' 7"	324,400	227,000	648,000	561,000	458,700	324,400
4-1/4	104	13	1,697,000	22' 2"	339,400	237,500	678,000	587,000	479,900	339,400
4-1/2	108	13-1/2	1,827,000	23' 6"	365,400	255,700	730,000	632,000	516,000	365,400
4-5/8	112	14	1,880,000	24' 1"	376,000	263,200	752,000	651,000	531,000	376,000
4-3/4	116	14-1/2	1,927,000	24' 8"	385,400	269,700	770,000	667,000	545,000	385,400
5	120	15	2,069,500	25' 11"	413,900	289,700	827,000	716,000	585,000	413,900
5-1/8	124	15-1/2	2,212,000	26' 7"	442,400	309,600	884,000	766,000	625,000	442,400
5-1/4	128	16	2,355,000	27' 2"	471,000	329,700	942,000	815,000	666,000	471,000
5-1/2	132	16-1/2	2,497,500	28' 5"	499,500	349,600	999,000	865,000	706,000	499,500
5-5/8	136	17	2,640,000	29' 1"	528,000	369,600	1,056,000	914,000	746,000	528,000
5-3/4	140	17-1/2	2,782,500	29' 8"	556,000	389,500	1,113,000	963,000	787,000	556,000
6	144	18	2,925,000	30' 11"	585,000	409,000	1,170,000	1,013,000	827,000	585,000
6-1/8	148	18-1/2	3,068,000	31' 6"	613,000	429,000	1,227,000	1,062,000	867,000	613,000
6-1/4	152	19	3,210,500	32' 2"	642,000	449,000	1,284,000	1,112,000	908,000	642,000
6-1/2	156	19-1/2	3,353,000	33' 5"	670,000	469,000	1,341,000	1,161,000	948,000	670,000
6-5/8	160	20	3,496,000	34' 0"	699,000	489,000	1,398,000	1,211,000	988,000	699,000

Chart continues on next page, along with caution statements and effect of bending considerations.

Eye & Eye Sling Ratings—LBS

Vertical, choker and basket hitches
Basket hitch at varying angles

Ratings based on Design Factor of 5:1

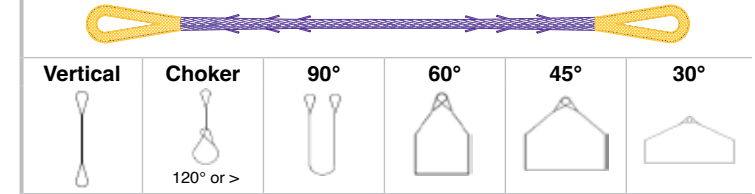

Nominal Size				Minimum Sling Length Ft/Inch	Sling Capacity Ratings at Work Load Limits (WLL) in Pounds Do Not Exceed WLL					
Dia. inch	Dia. mm	Circ. inch	MBL-pounds		Plasma® 12-Strand					
6-3/4	164	20-1/2	3,638,500	34' 8"	727,000	509,000	1,455,000	1,260,000	1,029,000	727,000
7	168	21	3,781,000	35' 11"	756,000	529,000	1,512,000	1,309,000	1,069,000	756,000
7-1/8	172	21-1/2	3,963,500	36' 6"	792,000	554,000	1,585,000	1,372,000	1,121,000	792,000
7-1/4	176	22	4,066,000	37' 1"	813,000	569,000	1,626,000	1,408,000	1,150,000	813,000
7-1/2	180	22-1/2	4,209,000	38' 5"	841,000	589,000	1,683,000	1,458,000	1,190,000	841,000
7-5/8	184	23	4,351,500	39' 0"	870,000	609,000	1,740,000	1,507,000	1,230,000	870,000
7-3/4	188	23-1/2	4,494,000	39' 7"	898,000	629,000	1,797,000	1,556,000	1,271,000	898,000
8	192	24	4,637,000	40' 11"	927,000	649,000	1,854,000	1,606,000	1,311,000	927,000
8-1/8	196	24-1/2	4,779,000	41' 6"	955,000	669,000	1,911,000	1,655,000	1,351,000	955,000
8-1/4	200	25	4,922,000	42' 1"	984,000	689,000	1,968,000	1,705,000	1,392,000	984,000

Minimum Break Load (MBL) in pounds is determined using spliced test samples in accordance with Cordage Institute 1500-02 - Test Method for Fiber Ropes.

Minimum sling length on Cortland fabricated Eye & Eye slings assumes 1) a compressed minimum eye length of 6.75 times the rope diameter in inches, and 2) a clear span area between splices of 10 times Cortland rope circumference in feet.

The recommended Design Factor (DF) of 5:1 on this chart is based on several existing sling standards including ASME B30.9. This design factor takes into account various factors including the use of Ultra High Molecular Weight Polyethylene (UHMWPE) fiber which is extremely durable and resistant to repeated high loads. Plasma® rope slings have and can be used with different DF ratios: however, this is a decision which must be made by a qualified person in conjunction with the rope manufacturer.

We recommend the use of wear protection around choking points. Please consult Cortland if you require the use of our fiber rope slings in a choker hitch at a lifting angle of less than 120°, following ASME B30.9 guidelines.

Bending Guidance

In theory, a sling used in a basket configuration could have twice the working load as a sling in a vertical configuration because two ropes are now holding the load instead of one. However, the decrease in tensile stress is partially offset by an increase in bending stress. The magnitude of this bending stress is dependent on the size and shape of the contact surface. Users must account for the bending strength loss with an efficiency factor as shown below in the Reduced Basket Capacity Calculation.

The bending efficiency reduces as the D:d ratio is reduced. Example: a 5:1 D:d ratio provides 80% efficiency.

Reduced Basket Capacity Calculation
 $C = B \times e$

C = Reduced Basket Capacity due to bending efficiency reduction

B = Rated Basket Capacity with consideration of horizontal sling fleet angle

e = Bending efficiency percentage


● Represents a contact surface that is equal to or greater than the rope diameter

● Represents a contact surface with a D:d ratio of one or greater. Refer to the Efficiency Table for deductions as needed.

Efficiency Table	
D:d Ratio	eff % (e)
25:1	100.0%
8:1	82.5%
5:1	80.0%
3:1	75.0%
2:1	72.5%
1:1	65.0%

Plasma® Rope Sling Rating Charts

Endless Grommet Sling Ratings—LBS
 One splice in one leg
 Vertical, choker and basket hitches
 Basket hitch at varying angles
 Ratings based on Design Factor of 5:1 and D:d of 8:1

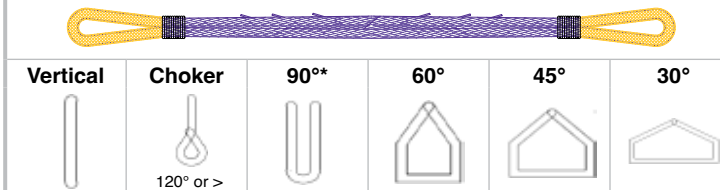


Nominal Size				Minimum Sling Length Ft/Inch	Sling Capacity Ratings at Work Load Limits (WLL) in Pounds Do Not Exceed WLL					
Dia. inch	Dia. mm	Circ. inch	MBL-pounds		Plasma® 12-Strand					
1/4	6	3/4	13,200	0' 6"	2,640	1,120	4,750	4,110	3,360	2,370
5/16	8	15/16	19,305	0' 8"	3,860	1,630	6,940	6,010	4,910	3,470
3/8	9	1-1/8	28,875	0' 10"	5,770	2,450	10,300	9,000	7,350	5,190
7/16	11	1-1/4	34,650	0' 11"	6,930	2,940	12,400	10,800	8,820	6,230
1/2	12	1-1/2	51,645	1' 0"	10,300	4,380	18,500	16,100	13,100	9,290
9/16	14	1-3/4	62,535	1' 2"	12,500	5,300	22,500	19,400	15,900	11,200
5/8	16	2	84,810	1' 4"	16,900	7,190	30,500	26,400	21,500	15,200
3/4	18	2-1/4	113,025	1' 6"	22,600	9,590	40,600	35,200	28,700	20,300
13/16	20	2-1/2	122,100	1' 8"	24,400	10,300	43,900	38,000	31,000	21,900
7/8	22	2-3/4	152,790	1' 10"	30,500	12,900	55,000	47,600	38,800	27,500
1	24	3	181,500	2' 0"	36,300	15,400	65,300	56,500	46,200	32,600
1-1/16	26	3-1/4	213,180	2' 2"	42,600	18,000	76,700	66,400	54,200	38,300
1-1/8	28	3-1/2	242,550	2' 4"	48,500	20,500	87,300	75,600	61,700	43,600
1-1/4	30	3-3/4	272,250	2' 6"	54,400	23,100	98,000	84,800	69,300	49,000
1-5/16	32	4	323,400	2' 8"	64,600	27,400	116,400	100,800	82,300	58,200
1-1/2	36	4-1/2	364,650	3' 0"	72,900	30,900	131,200	113,600	92,800	65,600

				Minimum Sling Length Ft/Inch	Sling Capacity Ratings at Work Load Limits (WLL) in Pounds Do Not Exceed WLL					
Dia. inch	Dia. mm	Circ. inch	MBL-pounds		Plasma® 12x12					
1-5/8	40	5	480,150	3' 4"	96,000	40,700	172,800	149,600	122,200	86,400
1-3/4	44	5-1/2	518,100	3' 6"	103,600	43,900	186,500	161,500	131,800	93,200
2	48	6	585,750	4' 0"	117,100	49,700	210,800	182,600	149,100	105,400
2-1/8	52	6-1/2	706,200	4' 4"	141,200	59,900	254,200	220,100	179,700	127,100
2-1/4	56	7	793,650	4' 6"	158,700	67,300	285,700	247,400	202,000	142,800
2-1/2	60	7-1/2	874,500	5' 0"	174,900	74,200	314,800	272,600	222,600	157,400
2-5/8	64	8	983,400	5' 4"	196,600	83,400	354,000	306,500	250,300	177,000
2-3/4	68	8-1/2	1,089,000	5' 6"	217,800	92,400	392,000	339,500	277,200	196,000
3	72	9	1,287,000	6' 0"	257,400	109,200	463,300	401,200	327,600	231,600
3-1/8	76	9-1/2	1,402,500	6' 4"	280,500	119,000	504,000	437,200	357,000	252,400
3-1/4	80	10	1,551,000	6' 6"	310,200	131,600	558,000	483,500	394,800	279,100
3-1/2	84	10-1/2	1,828,200	7' 0"	365,600	155,100	658,000	569,000	465,300	329,000
3-5/8	88	11	2,062,500	7' 4"	412,500	175,000	742,000	643,000	525,000	371,200
3-3/4	92	11-1/2	2,173,050	7' 6"	434,600	184,300	782,000	677,000	553,000	391,100
4	96	12	2,508,000	8' 0"	501,000	212,800	902,000	781,000	638,000	451,400
4-1/8	100	12-1/2	2,676,300	8' 4"	535,000	227,000	963,000	834,000	681,000	481,700
4-1/4	104	13	2,800,050	8' 6"	560,000	237,500	1,008,000	872,000	712,000	504,000
4-1/2	108	13-1/2	3,014,550	9' 0"	602,000	255,700	1,085,000	939,000	767,000	542,000
4-5/8	112	14	3,102,000	9' 4"	620,000	263,200	1,116,000	967,000	789,000	558,000
4-3/4	116	14-1/2	3,179,550	9' 6"	635,000	269,700	1,144,000	991,000	809,000	572,000
5	120	15	3,414,675	10' 0"	682,000	289,700	1,229,000	1,064,000	869,000	614,000
5-1/8	124	15-1/2	3,649,800	10' 4"	729,000	309,600	1,313,000	1,137,000	929,000	656,000
5-1/4	128	16	3,885,750	10' 6"	777,000	329,700	1,398,000	1,211,000	989,000	699,000
5-1/2	132	16-1/2	4,120,875	11' 0"	824,000	349,600	1,483,000	1,284,000	1,049,000	741,000
5-5/8	136	17	4,356,000	11' 4"	871,000	369,600	1,568,000	1,358,000	1,108,000	784,000
5-3/4	140	17-1/2	4,591,125	11' 6"	918,000	389,500	1,652,000	1,431,000	1,168,000	826,000
6	144	18	4,826,250	12' 0"	965,000	409,000	1,737,000	1,504,000	1,228,000	868,000
6-1/8	148	18-1/2	5,062,200	12' 4"	1,012,000	429,000	1,822,000	1,578,000	1,288,000	911,000

Chart continues on next page, along with caution statements and effect of bending considerations.

Endless Grommet Sling Ratings—LBS
 One splice in one leg
 Vertical, choker and basket hitches
 Basket hitch at varying angles
 Ratings based on Design Factor of 5:1 and D:d of 8:1

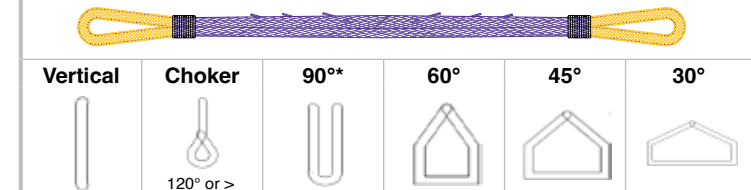

Nominal Size				Minimum Sling Length Ft/Inch	Sling Capacity Ratings at Work Load Limits (WLL) in Pounds Do Not Exceed WLL					
Dia. inch	Dia. mm	Circ. inch	MBL-pounds		Plasma® 12-Strand					
6-1/4	152	19	5,297,325	12' 6"	1,059,000	449,000	1,907,000	1,651,000	1,348,000	953,000
6-1/2	156	19-1/2	5,532,450	13' 0"	1,106,000	469,000	1,991,000	1,724,000	1,408,000	995,000
6-5/8	160	20	5,768,400	13' 4"	1,153,000	489,000	2,076,000	1,798,000	1,468,000	1,038,000
6-3/4	164	20-1/2	6,003,525	13' 6"	1,200,000	509,000	2,161,000	1,871,000	1,528,000	1,080,000
7	168	21	6,238,650	14' 0"	1,247,000	529,000	2,245,000	1,945,000	1,588,000	1,122,000
7-1/8	172	21-1/2	6,539,775	14' 4"	1,307,000	554,000	2,354,000	2,038,000	1,664,000	1,177,000
7-1/4	176	22	6,708,900	14' 6"	1,341,000	569,000	2,415,000	2,091,000	1,707,000	1,207,000
7-1/2	180	22-1/2	6,944,850	15' 0"	1,388,000	589,000	2,500,000	2,165,000	1,767,000	1,250,000
7-5/8	184	23	7,179,975	15' 4"	1,435,000	609,000	2,584,000	2,238,000	1,827,000	1,292,000
7-3/4	188	23-1/2	7,415,100	15' 6"	1,483,000	629,000	2,669,000	2,311,000	1,887,000	1,334,000
8	192	24	7,651,050	16' 0"	1,530,000	649,000	2,754,000	2,385,000	1,947,000	1,377,000
8-1/8	196	24-1/2	7,885,350	16' 4"	1,577,000	669,000	2,838,000	2,458,000	2,007,000	1,419,000
8-1/4	200	25	8,121,300	16' 6"	1,624,000	689,000	2,923,000	2,531,000	2,067,000	1,461,000

* This MBL includes a 10% reduction due to 55:45% load sharing. Minimum Break Load (MBL) in pounds is determined using spliced test samples in accordance with Cordage Institute 1500-02 - Test Method for Fiber Ropes. Specifications for endless loop (grommet) Plasma® rope slings assume one end-to-end splice. The length of splice determines the minimum length of a grommet sling. The recommended Design Factor (DF) of 5:1 on this chart is based on several existing sling standards including ASME B30.9. This design factor takes into account various factors including the use of Ultra High Molecular Weight Polyethylene (UHMWPE) fiber which is extremely durable and resistant to repeated high loads. Plasma® rope slings have and can be used with different DF ratios: however, this is a decision which must be made by a qualified person in conjunction with the rope manufacturer. Please consult Cortland if you require the use of our fiber rope slings in a choker hitch at a lifting angle of less than 120°, following ASME B30.9 guidelines.

Bending Guidance

In theory, a sling used in a basket configuration could have twice the working load as a sling in a vertical configuration because there are double the number of supporting strands. However, the decrease in tensile stress is partially offset by an increase in bending stress. The magnitude of this bending stress is dependent on the size and shape of the contact surface. Users must account for the bending strength loss with an efficiency factor as shown below in the Reduced Basket Capacity Calculation.

The bending efficiency reduces as the D:d ratio is reduced. Example: a 5:1 D:d ratio provides 97% efficiency.

Reduced Basket Capacity Calculation
 $C = B \times e$

C = Reduced Basket Capacity due to bending efficiency reduction

B = Rated Basket Capacity with consideration of horizontal sling fleet angle

e = Bending efficiency percentage

↑ ↑ ↑

↓ ↓ ↓

⊗ Represents a contact surface with a D:d ratio of one or greater. Refer to the Efficiency Table for deductions as needed.


Efficiency Table	
D:d Ratio	eff % (e)
8:1	100.0%
5:1	97.0%
3:1	91.0%
2:1	88.0%
1:1	79.0%

Plasma® Rope Sling Rating Charts

Eye & Eye Sling Ratings—tonnes

Vertical, choker and basket hitches
Basket hitch at varying angles

Ratings based on Design Factor of 5:1

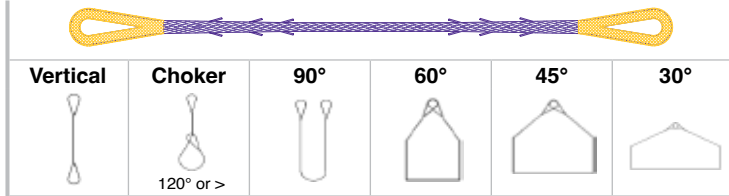


Nominal Size				Minimum Sling Length m	Sling Capacity Ratings at Work Load Limits (WLL) in tonnes Do Not Exceed WLL					
Dia. inch	Dia. mm	Circ. inch	MBL tonnes		Plasma® 12-Strand					
1/4	6	3/4	3.6	0.7	0.7	0.5	1.4	1.2	1.0	0.7
5/16	8	15/16	5.3	0.8	1.0	0.7	2.1	1.8	1.5	1.0
3/8	9	1-1/8	7.9	0.9	1.5	1.1	3.1	2.7	2.2	1.5
7/16	11	1-1/4	9.5	0.9	1.9	1.3	3.8	3.2	2.6	1.9
1/2	12	1-1/2	14.2	1.0	2.8	1.9	5.6	4.9	4.0	2.8
9/16	14	1-3/4	17.2	1.1	3.4	2.4	6.8	5.9	4.8	3.4
5/8	16	2	23.3	1.2	4.6	3.2	9.3	8.0	6.5	4.6
3/4	18	2-1/4	31.1	1.3	6.2	4.3	12.4	10.7	8.7	6.2
13/16	20	2-1/2	33.6	1.4	6.7	4.6	13.4	11.6	9.4	6.7
7/8	22	2-3/4	42.0	1.5	8.4	5.8	16.8	14.5	11.8	8.4
1	24	3	49.9	1.7	9.9	6.9	19.9	17.2	14.1	9.9
1-1/16	26	3-1/4	58.6	1.8	11.7	8.2	23.4	20.3	16.5	11.7
1-1/8	28	3-1/2	66.7	1.8	13.3	9.3	26.6	23.0	18.8	13.3
1-1/4	30	3-3/4	74.8	2.0	14.9	10.4	29.9	25.9	21.1	14.9
1-5/16	32	4	88.9	2.1	17.7	12.4	35.5	30.7	25.1	17.7
1-1/2	36	4-1/2	100.2	2.3	20.0	14.0	40.0	34.7	28.3	20.0
Plasma® 12x12										
1-5/8	40	5	131	2.8	26	18	52	45	37	26
1-3/4	44	5-1/2	142	3.0	28	19	56	49	40	28
2	48	6	161	3.4	32	22	64	55	45	32
2-1/8	52	6-1/2	194	3.6	38	27	77	67	54	38
2-1/4	56	7	218	3.8	43	30	87	75	61	43
2-1/2	60	7-1/2	240	4.1	48	33	96	83	67	48
2-5/8	64	8	270	4.3	54	37	108	93	76	54
2-3/4	68	8-1/2	299	4.5	59	41	119	103	84	59
3	72	9	353	4.9	70	49	141	122	99	70
3-1/8	76	9-1/2	385	5.1	77	53	154	133	108	77
3-1/4	80	10	426	5.3	85	59	170	147	120	85
3-1/2	84	10-1/2	502	5.7	100	70	200	173	141	100
3-5/8	88	11	566	5.9	113	79	226	196	160	113
3-3/4	92	11-1/2	597	6.0	119	83	238	206	168	119
4	96	12	689	6.4	137	96	275	238	194	137
4-1/8	100	12-1/2	735	6.6	147	102	294	254	207	147
4-1/4	104	13	769	6.8	153	107	307	266	217	153
4-1/2	108	13-1/2	828	7.2	165	115	331	286	234	165
4-5/8	112	14	852	7.4	170	119	340	295	240	170
4-3/4	116	14-1/2	874	7.6	174	122	349	302	247	174
5	120	15	938	7.9	187	131	375	324	265	187
5-1/8	124	15-1/2	1,003	8.1	200	140	401	347	283	200
5-1/4	128	16	1,068	8.3	213	149	427	369	302	213
5-1/2	132	16-1/2	1,132	8.7	226	158	452	392	320	226
5-5/8	136	17	1,197	8.9	239	167	478	414	338	239
5-3/4	140	17-1/2	1,262	9.1	252	176	504	437	356	252
6	144	18	1,326	9.5	265	185	530	459	375	265
6-1/8	148	18-1/2	1,391	9.6	278	194	556	481	393	278

Chart continues on next page, along with caution statements and effect of bending considerations.

Eye & Eye Sling Ratings—tonnes

Vertical, choker and basket hitches
Basket hitch at varying angles

Ratings based on Design Factor of 5:1

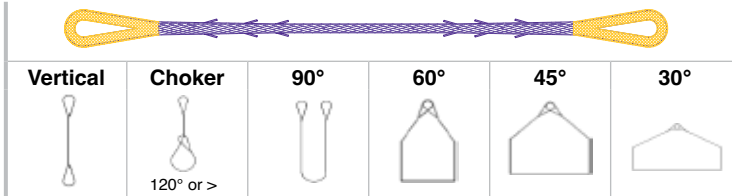

Nominal Size				Minimum Sling Length m	Sling Capacity Ratings at Work Load Limits (WLL) in tonnes Do Not Exceed WLL					
Dia. inch	Dia. mm	Circ. inch	MBL tonnes		Plasma® 12-Strand					
6-1/4	152	19	1,456	9.8	291	203	582	504	411	291
6-1/2	156	19-1/2	1,520	10.2	304	212	608	526	429	304
6-5/8	160	20	1,585	10.4	317	221	634	549	448	317
6-3/4	164	20-1/2	1,650	10.6	330	231	660	571	466	330
7	168	21	1,715	11.0	343	240	686	594	485	343
7-1/8	172	21-1/2	1,797	11.2	359	251	718	622	508	359
7-1/4	176	22	1,844	11.4	368	258	737	638	521	368
7-1/2	180	22-1/2	1,909	11.7	381	267	763	661	539	381
7-5/8	184	23	1,973	11.9	394	276	789	683	558	394
7-3/4	188	23-1/2	2,038	12.1	407	285	815	705	576	407
8	192	24	2,103	12.5	420	294	841	728	594	420
8-1/8	196	24-1/2	2,167	12.7	433	303	866	750	612	433
8-1/4	200	25	2,232	12.9	446	312	892	773	631	446

Minimum Break Load (MBL) in tonnes is determined using spliced test samples in accordance with Cordage Institute 1500-02 - Test Method for Fiber Ropes.


Minimum sling length on Cortland fabricated Eye & Eye slings assumes 1) a compressed minimum eye length of 6.75 times the rope diameter in millimeters, and 2) a clear span area between splices of 10 times Cortland rope circumference in feet. The recommended Design Factor (DF) of 5:1 on this chart is based on several existing sling standards including ASME B30.9. This design factor takes into account various factors including the use of Ultra High Molecular Weight Polyethylene (UHMWPE) fiber which is extremely durable and resistant to repeated high loads. Plasma® rope slings have and can be used with different DF ratios: however, this is a decision which must be made by a qualified person in conjunction with the rope manufacturer. We recommend the use of wear protection around choking points. Please consult Cortland if you require the use of our fiber rope slings in a choker hitch at a lifting angle of less than 120°, following ASME B30.9 guidelines.

Bending Guidance

In theory, a sling used in a basket configuration could have twice the working load as a sling in a vertical configuration because two ropes are now holding the load instead of one. However, the decrease in tensile stress is partially offset by an increase in bending stress. The magnitude of this bending stress is dependent on the size and shape of the contact surface. Users must account for the bending strength loss with an efficiency factor as shown below in the Reduced Basket Capacity Calculation.

The bending efficiency reduces as the D:d ratio is reduced. Example: a 5:1 D:d ratio provides 80% efficiency.

Reduced Basket Capacity Calculation
 $C = B \times e$
C = Reduced Basket Capacity due to bending efficiency reduction
B = Rated Basket Capacity with consideration of horizontal sling fleet angle
e = Bending efficiency percentage

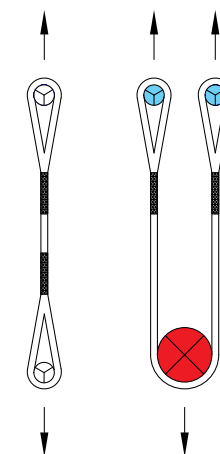


● Represents a contact surface that is equal to or greater than the rope diameter
● (with X) Represents a contact surface with a D:d ratio of one or greater. Refer to the Efficiency Table for deductions as needed.

Efficiency Table	
D:d Ratio	eff % (e)
25:1	100.0%
8:1	82.5%
5:1	80.0%
3:1	75.0%
2:1	72.5%
1:1	65.0%

Plasma® Rope Sling Rating Charts


Endless Grommet Sling Ratings—tonnes
 One splice in one leg
 Vertical, choker and basket hitches
 Basket hitch at varying angles
 Ratings based on Design Factor of 5:1 and D:d of 8:1

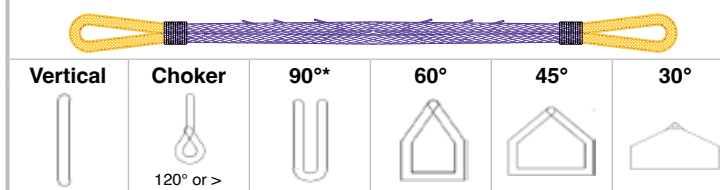

Nominal Size				Minimum Sling Length m	Sling Capacity Ratings at Work Load Limits (WLL) in tonnes Do Not Exceed WLL					
Dia. inch	Dia. mm	Circ. inch	MBL tonnes		Plasma® 12-Strand					
1/4	6	3/4	5.9	0.2	1.1	0.5	2.1	1.8	1.5	1.0
5/16	8	15/16	8.7	0.2	1.7	0.7	3.1	2.7	2.2	1.5
3/8	9	1-1/8	13.0	0.3	2.6	1.1	4.7	4.0	3.3	2.3
7/16	11	1-1/4	15.7	0.3	3.1	1.3	5.6	4.9	4.0	2.8
1/2	12	1-1/2	23.4	0.4	4.6	1.9	8.4	7.3	5.9	4.2
9/16	14	1-3/4	28.3	0.4	5.6	2.4	10.2	8.8	7.2	5.1
5/8	16	2	38.4	0.4	7.6	3.2	13.8	11.9	9.7	6.9
3/4	18	2-1/4	51.2	0.5	10.2	4.3	18.4	15.9	13.0	9.2
13/16	20	2-1/2	55.3	0.5	11.0	4.6	19.9	17.2	14.0	9.9
7/8	22	2-3/4	69.3	0.6	13.8	5.8	24.9	21.6	17.6	12.4
1	24	3	82.3	0.7	16.4	6.9	29.6	25.6	20.9	14.8
1	26	3-1/4	96.6	0.7	19.3	8.2	34.8	30.1	24.6	17.4
1-1/8	28	3-1/2	110.0	0.7	22.0	9.3	39.6	34.3	28.0	19.8
1-1/4	30	3-3/4	123.4	0.8	24.6	10.4	44.4	38.5	31.4	22.2
1-1/3	32	4	146.6	0.9	29.3	12.4	52.8	45.7	37.3	26.4
1-1/4	36	4-1/2	165.4	1.0	33.0	14.0	59.5	51.5	42.1	29.7
Plasma® 12x12										
1-5/8	40	5	217	1.0	43	18	78	67	55	39
1-3/4	44	5-1/2	235	1.1	47	19	84	73	59	42
2	48	6	265	1.3	53	22	95	82	67	47
2-1/8	52	6-1/2	320	1.3	64	27	115	99	81	57
2-1/4	56	7	359	1.4	71	30	129	112	91	64
2-1/2	60	7-1/2	396	1.6	79	33	142	123	100	71
2-5/8	64	8	446	1.7	89	37	160	139	113	80
2-3/4	68	8-1/2	493	1.7	98	41	177	154	125	88
3	72	9	583	1.9	116	49	210	182	148	105
3-1/8	76	9-1/2	636	2.0	127	53	229	198	161	114
3-1/4	80	10	703	2.0	140	59	253	219	179	126
3-1/2	84	10-1/2	829	2.2	165	70	298	258	211	149
3-5/8	88	11	935	2.3	187	79	336	291	238	168
3-3/4	92	11-1/2	985	2.3	197	83	354	307	250	177
4	96	12	1,137	2.5	227	96	409	354	289	204
4-1/8	100	12-1/2	1,213	2.6	242	103	437	378	309	218
4-1/4	104	13	1,270	2.6	254	107	457	395	323	228
4-1/2	108	13-1/2	1,367	2.8	273	116	492	426	348	246
4-5/8	112	14	1,407	2.9	281	119	506	438	358	253
4-3/4	116	14-1/2	1,442	2.9	288	122	519	449	367	259
5	120	15	1,548	3.1	309	131	557	482	394	278
5-1/8	124	15-1/2	1,655	3.2	331	140	595	516	421	297
5-1/4	128	16	1,762	3.3	352	149	634	549	448	317
5-1/2	132	16-1/2	1,869	3.4	373	158	672	582	475	336
5-5/8	136	17	1,975	3.5	395	167	711	616	502	355
5-3/4	140	17-1/2	2,082	3.6	416	176	749	649	530	374
6	144	18	2,187	3.7	437	185	787	681	556	393
6-1/8	148	18-1/2	2,294	3.8	458	194	825	715	583	412

Chart continues on next page, along with caution statements and effect of bending considerations.

Endless Grommet Sling Ratings—tonnes
 One splice in one leg
 Vertical, choker and basket hitches
 Basket hitch at varying angles
 Ratings based on Design Factor of 5:1 and D:d of 8:1

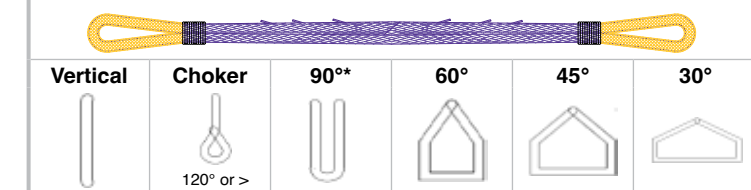

Nominal Size				Minimum Sling Length m	Sling Capacity Ratings at Work Load Limits (WLL) in tonnes Do Not Exceed WLL					
Dia. inch	Dia. mm	Circ. inch	MBL tonnes		Plasma® 12-Strand					
6-1/4	152	19	2,400	3.9	480	203	864	748	611	432
6-1/2	156	19-1/2	2,507	4.0	501	212	902	781	638	451
6-5/8	160	20	2,614	4.1	522	221	941	815	665	470
6-3/4	164	20-1/2	2,720	4.2	544	230	979	848	692	489
7	168	21	2,827	4.3	565	239	1017	881	719	508
7-1/8	172	21-1/2	2,963	4.4	592	251	1066	923	754	533
7-1/4	176	22	3,040	4.5	608	257	1094	947	773	547
7-1/2	180	22-1/2	3,147	4.6	629	267	1133	981	801	566
7-5/8	184	23	3,253	4.7	650	276	1171	1014	828	585
7-3/4	188	23-1/2	3,360	4.8	672	285	1209	1047	855	604
8	192	24	3,467	4.9	693	294	1248	1081	882	624
8-1/8	196	24-1/2	3,573	5.0	714	303	1286	1114	909	643
8-1/4	200	25	3,680	5.1	736	312	1324	1147	936	662

* This MBL includes a 10% reduction due to 55:45% load sharing. Minimum Break Load (MBL) in tonnes is determined using spliced test samples in accordance with Cordage Institute 1500-02 - Test Method for Fiber Ropes. Specifications for endless loop (grommet) Plasma® rope slings assume one end-to-end splice. The length of splice determines the minimum length of a grommet sling. The recommended Design Factor (DF) of 5:1 on this chart is based on several existing sling standards including ASME B30.9. This design factor takes into account various factors including the use of Ultra High Molecular Weight Polyethylene (UHMWPE) fiber which is extremely durable and resistant to repeated high loads. Plasma rope slings have and can be used with different DF ratios: however, this is a decision which must be made by a qualified person in conjunction with the rope manufacturer. We recommend the use of wear protection around chocking points. Please consult Cortland if you require the use of our fiber rope slings in a choker hitch at a lifting angle of less than 120°, following ASME B30.9 guidelines.

Bending Guidance

In theory, a sling used in a basket configuration could have twice the working load as a sling in a vertical configuration because there are double the number of supporting strands. However, the decrease in tensile stress is partially offset by an increase in bending stress. The magnitude of this bending stress is dependent on the size and shape of the contact surface. Users must account for the bending strength loss with an efficiency factor as shown below in the Reduced Basket Capacity Calculation.

The bending efficiency reduces as the D:d ratio is reduced. Example: a 5:1 D:d ratio provides 97% efficiency.

Reduced Basket Capacity Calculation
 $C = B \times e$
C = Reduced Basket Capacity due to bending efficiency reduction
B = Rated Basket Capacity with consideration of horizontal sling fleet angle
e = Bending efficiency percentage

Represents a contact surface with a D:d ratio of one or greater. Refer to the Efficiency Table for deductions as needed.

Efficiency Table	
D:d Ratio	eff % (e)
8:1	100.0%
5:1	97.0%
3:1	91.0%
2:1	88.0%
1:1	79.0%

SRS™ Slings



SRS™ slings from Cortland feature an endless loop construction (parallel laid endless filaments) of UHMWPE material, enabling these slings to be manufactured with very low elongation under load; and at very high strength. They are available in short lengths, with vertical capacities from 40,000 lbs (18.2Te) to 500,000 lbs (226.8Te); higher capacities are available upon request.

Their lightweight design and equal strength-to-size profile vs. wire rope make these ideal tools for heavy lifts. To protect potential wear areas from abrasion, cutting, or snagging, the core material is encased in a tough protective nylon jacket to ensure a durable and long-lasting lift solution.

Features

- Stronger, safer, and easier to handle than steel
- Lightweight and flexible
- Lengths from 5ft (1.524 m) to 72 ft (22 m); longer lengths available upon request
- Matched slings are easily achieved, +/- 0.25% of nominal length, +/- 0.394 inches (10 mm) between matched sets
- Vertical capacities from 40,000 to 500,000 lbs as standard
- Friendly on painted surfaces or sensitive equipment
- Durable construction
- Repairable or replaceable jacket

All Cortland SRS slings are proof loaded and length verified and supplied with a proof loading certificate; third party witnessing is available upon request.



SRS™ Slings are available as standard, in lengths varying from a short 5 ft (1.524 m) up to 72 ft (22 m); please specify length at time of order. Higher capacities and custom designs are available upon request.

SRS™ Slings

Vertical Lift Rating to ASME B30.9 (5:1 WLL)

Part No	Sling Details							
	Approximate Diameter		Weight		Minimum Bending Diameter		Minimum Width	
	inch	mm	lbs/ft	kg/m	inch	mm	inch	mm
SRS-40	2.2	56	1.7	1.2	1.95	49	2.9	73
SRS-50	2.4	61	2.0	1.4	2.14	54	3.1	79
SRS-60	2.6	66	2.3	1.5	2.33	59	3.4	86
SRS-70	2.8	70	2.6	1.7	2.51	64	3.6	91
SRS-85	3.0	75	3.0	2.0	2.78	71	3.9	98
SRS-100	3.2	80	3.5	2.4	3.05	77	4.1	104
SRS-125	3.5	88	4.3	2.9	3.5	89	4.5	114
SRS-150	3.7	95	4.6	3.1	3.93	100	4.8	124
SRS-175	3.9	100	5.3	3.5	4.35	110	5.1	130
SRS-200	4.2	107	6.3	4.2	4.76	121	5.5	139
SRS-250	4.5	115	7.7	5.1	5.56	141	5.9	150
SRS-275	4.7	119	8.4	5.6	5.94	151	6.1	155
SRS-300	4.9	123	9.2	6.2	6.31	160	6.3	160
SRS-400	5.5	138	12.4	8.4	7.7	196	7.1	179
SRS-500	6.0	152	15.8	10.6	8.92	227	7.8	198

Chart continues below

Part No	Rated Capacity					
	Vertical		Choker		Basket	
	lbs	Te	lbs	Te	lbs	Te
SRS-40	40,000	18.2	32,000	14.5	80,000	36.4
SRS-50	50,000	22.8	40,000	18.2	100,000	45.6
SRS-60	60,000	27.4	48,000	21.9	120,000	54.8
SRS-70	70,000	31.8	56,000	25.4	140,000	63.6
SRS-85	85,000	38.6	68,000	30.8	170,000	77.2
SRS-100	100,000	45.4	80,000	36.3	200,000	90.8
SRS-125	125,000	56.8	100,000	45.4	250,000	113.6
SRS-150	150,000	68.2	120,000	54.5	300,000	136.4
SRS-175	175,000	79.4	140,000	63.5	350,000	158.8
SRS-200	200,000	90.8	160,000	72.6	400,000	181.6
SRS-250	250,000	113.4	200,000	90.7	500,000	226.8
SRS-275	275,000	124.8	220,000	99.8	550,000	249.6
SRS-300	300,000	136.2	240,000	108.9	600,000	272.4
SRS-400	400,000	181.6	320,000	145.2	800,000	363.2
SRS-500	500,000	226.8	400,000	181.4	1,000,000	453.6

Extender™ Adjustable Slings



When load handling heavy equipment becomes a challenge—especially when lifting loads with differential sling lengths—adjustable high performance synthetic rope slings are ideal tools. Cortland offers high performance synthetic fiber rope slings in an adjustable form: Extender™ Slings.

Extender Slings have one permanent eye, and one eye that is adjustable, which means it can be tightly sized to fit an application, then lengthened or shortened to fit a different application. A single Extender Sling can solve lifting requirements in a wide variety of situations. This changes a high performance rope sling from a specific-use tool, to one that is adaptable for multiple uses; minimizing the number of lifting slings needed in-stock.

Extender Slings are currently available with standard vertical lifting capacities from 10 to 250 tons. All single leg or multi-leg Extender slings are proof-loaded to 2x WLL (5:1), have less than 1% elongation under WLL, and are properly tagged.

Features and Benefits

- UHMWPE high performance lifting sling
- One permanent eye, one adjustable eye
- Length adjustable, to use in a variety of applications
- Opposing force tightens the adjustable splice, preventing any lengthening of the sling
- Lightweight flexibility for safe and fast rigging
- Minimum length dependent on rope diameter size; no max length limitations
- Easy to inspect
- Durable cut-resistant eye terminations
- Many wear protection options, offering increased protection yet allowing for inspection



Extender™ Slings are adjustable to allow use in a variety of applications; they feature one permanent eye and one adjustable eye

Extender™ Adjustable Slings

Nominal diameter	Size (circ. in.)	Sling Rated Capacities @ 5:1 WLL (lbs)				Minimum eye size		Minimum OAL		
		Vertical		Basket		inches	mm	feet	m	
inches	mm	lbs	tonnes	lbs	tonnes					
Plasma 12 Strand										
1/4	6	3/4	1,280	0.6	2,560	1.2	6	152.4	4	1.2
5/16	8	15/16	1,872	0.8	3,744	1.7	6	152.4	4	1.2
3/8	9	1-1/8	2,800	1.3	5,600	2.5	6	152.4	5	1.5
7/16	11	1-1/4	3,360	1.5	6,720	3.0	6	152.4	6	1.8
1/2	12	1-1/2	5,008	2.3	10,016	4.5	6	152.4	6	1.8
9/16	14	1-3/4	6,064	2.8	12,128	5.5	6	152.4	7	2.1
5/8	16	2	8,224	3.7	16,448	7.5	6	152.4	7	2.1
3/4	18	2-1/4	10,960	5.0	21,920	9.9	6	152.4	8	2.4
13/16	20	2-1/2	11,840	5.4	23,680	10.7	6	152.4	9	2.7
7/8	22	2-3/4	14,816	6.7	29,632	13.4	6	152.4	10	3.0
1	24	3	17,600	8.0	35,200	16.0	8	203.2	11	3.4
1-1/16	26	3-1/4	20,672	9.4	41,334	18.7	8	203.2	12	3.7
1-1/8	28	3-1/2	23,520	10.7	47,040	21.3	8	203.2	12	3.7
1-1/4	30	3-3/4	26,400	12.0	52,800	23.9	8	203.2	13	4.0
1-5/16	32	4	31,360	14.2	62,720	28.4	8	203.2	14	4.3
1-1/2	36	4-1/2	35,360	16.0	70,720	32.1	8	203.2	16	4.9
Plasma 12x12										
1-5/8	40	5	46,560	21.1	93,120	42.2	12	304.8	18	5.5
1-3/4	44	5-1/2	50,240	22.8	100,480	45.6	12	304.8	20	6.1
2	48	6	56,800	25.8	113,600	51.5	12	304.8	21	6.4
2-1/8	52	6-1/2	68,480	31.1	136,960	62.1	12	304.8	23	7.0
2-1/4	56	7	76,960	34.9	153,920	69.8	12	304.8	26	7.9
2-1/2	60	7-1/2	84,800	38.5	169,600	76.9	12	304.8	27	8.2
2-5/8	64	8	95,360	43.3	190,720	86.5	12	304.8	27	8.2
2-3/4	68	8-1/2	105,600	47.9	211,200	95.8	12	304.8	28	8.5
3	72	9	124,800	56.6	249,600	113.2	12	304.8	30	9.1
3-1/8	76	9-1/2	136,000	61.7	272,000	123.4	18	457.2	32	9.8
3-1/4	80	10	150,400	68.2	300,800	136.4	18	457.2	34	10.4
3-1/2	84	10-1/2	177,280	80.4	354,560	160.8	18	457.2	36	11.0
3-5/8	88	11	200,000	90.7	400,000	181.4	18	457.2	37	11.3
3-3/4	92	11-1/2	210,720	95.6	421,440	191.2	18	457.2	38	11.6
4	96	12	243,200	110.3	486,400	220.6	18	457.2	40	12.2

Extender™ slings must only be basketed in the slings' clear spans and never loaded on a spliced area. Extender slings must never be used in a choker configuration.

This MBL includes a 20% reduction from traditional, non-adjustable Plasma Eye and Eye Slings due to efficiency losses in the adjustable splice. Minimum Break Load (MBL) in pounds is determined using spliced test samples in accordance with Cordage Institute 1500-02—Test Method for Fiber Ropes. Specifications for Extender slings assume one fixed eye splice and one adjustable "pass through" splice. The length of the two splices determines the minimum length of the Extender Sling.

This design factor takes into account various factors including the use of Ultra High Molecular Weight Polyethylene (UHMWPE) fiber which is extremely durable and resistant to repeated high loads. The recommended Design Factor (DF) of 5:1 on this chart is based on several existing sling standards including ASME B30.9. Extender rope slings have and can be used with different DF ratios; however, this is a decision which must be made by a qualified person in conjunction with the rope manufacturer.

Wear Protection

Wear protection products maximize service life of synthetic slings

Integrated Hardware

Engineered hardware for specific operations



SX



Cortland Cage



Asguard



DXC



XT



PNW available in tubular form, or hook-and-clasp

Durability is also an important factor of overall lifting sling cost. With the addition of wear protection gear the useful life of slings can be significantly increased, creating maximum cost efficiency with minimal maintenance. For further details on our protective jacket solutions, refer to our Wear Protection brochure.

SX Wear Protection a braided tubular structure offering 100% protection to the rope.

Cortland Cage combines the lightweight, abrasion resistant, and non-water-absorbing properties of UHMWPE fiber in a braided cover sleeve.

Asgard Wear Protection is made from UHMWPE and PNW fibers in a woven, laminated and PU-coated construction and built in a layered design.

DXC Wear Protection is a tightly braided tubular polyester wear protection sleeve with proprietary marine polyurethane coating for use in extreme applications.

XT Wear Protection is a tightly braided tubular polyester wear protection sleeve with proprietary heavy marine polyurethane coating for use in extreme wear applications. Less flexible than other wear protection options.

PNW Wear Protection is a woven fiber material and the most commonly used protection for abrasion; available in both tubular, and hook-and-clasp options.



To utilize synthetic slings fully, we continue to develop new items of hardware that can interface with our slings, tethers, and rope systems. Some hardware components are specially designed for ROV installation without the need for costly diver intervention. For instance, WLL 100t hooks and slings can be manufactured to a weight of <100Kg, enabling an ROV to handle such a system.

We also offer custom-designed hooks for load transfer operations and pull-in operations, according to client-specific dimensions and capacity requirements. Examples include: hooks, delta plates, plate shackles, and anchor bases.

Features:

- ROV and sling friendly designs
- Variety of latch options
- Project-specific capacities
- Delivered with full design package (structural, corrosion and fatigue)

What can we do for you?

Whatever your particular challenge, Cortland welcomes the opportunity to solve it.

We have the unique experience to help any company lower costs, save time, increase safety and gain far better efficiencies. Our service doesn't end with product delivery. We also provide ongoing technical support and training for everyone involved with operating and maintaining the solution we provide.

Please email cortland@cortlandcompany.com for an initial discussion, or visit us online at cortlandcompany.com.

USA – Anacortes, WA
Tel: +1 (360) 293-8488
cortland@cortlandcompany.com

The Netherlands – Ede
Tel: +31 682 101 602
cortland@cortlandcompany.com

USA – Houston, TX
Tel: +1 (832) 833-8000
cortland@cortlandcompany.com



Cortland is a global designer, manufacturer, and supplier of technologically advanced ropes, slings, and strength members. Collaborating with customers, our team uses its experience in high performance materials and market knowledge to transform ideas into proven products.

For more than 35 years, our custom-built solutions have been developed for work in the toughest environments and to overcome some of the world's greatest challenges. They consistently enable our customers to meet the demands of the aerospace, defense, research, subsea, marine, and energy industries.

cortlandcompany.com