

BOB® 12 Strand

BOB® 12 strand is a high strength, low elongating single braided patented rope construction with excellent long term creep resistance and superior cyclic fatigue performance, especially in bend-over-sheave applications. BOB® 12 Strand comes standard with a specially formulated coating that is designed to maximize the rope's durability in bending situations.

BOB® 12 Strand is easily spliced using a simple lockstitch type splice, brummel splice, 4-3-2 or 5-4-3 tuck splice. The soft, torque free braided construction provides ease of handling.

Features & Benefits

- High strength
- Low stretch
- Ultra low creep
- Soft hand
- Torque free
- Easy splicing

Applications

- Replacement for wire rope deep water lifting
- Use on drum and traction winches
- Active heave compensation systems
- Heavy lift slings
- High fatigue applications
- Seismic tow cables
- Tether applications
- Theatrical rigging

Nominal Diameter		Size (circ in.)	Approximate Weight		Minimum Tensile Strength Spliced Rope		Minimum Tensile Strength ISO Unspliced Rope	
inch	mm		lbs/100ft	kg/100m	lbs	MT (tonnes)	lbs	MT (tonnes)
0.1	2.5	0.3	0.3	0.5	1,260	0.6	1,400	0.6
1/8	3	3/8	0.6	0.9	1,900	0.9	2,100	1.0
3/16	5	9/16	1.3	1.9	5,400	2.5	6,000	2.7
1/4	6	3/4	2.2	3.2	7,700	3.5	8,600	3.9
5/16	8	15/16	3.1	4.7	13,900	6.3	15,400	7.0
3/8	9	1-1/8	4.5	6.7	17,300	7.8	19,200	8.7
7/16	11	1-1/4	5.9	8.9	23,900	10.8	26,600	12.1
1/2	12	1-1/2	8.4	12.6	28,100	12.7	31,200	14.2
9/16	14	1-3/4	10.3	15.4	40,100	18.2	44,600	20.2
5/8	16	2	12.9	19.3	51,400	23.3	57,100	25.9
3/4	18	2-1/4	16.9	25.1	68,500	31.1	76,100	34.5
13/16	20	2-1/2	19.6	29.2	74,000	33.6	82,200	37.2
7/8	22	2-3/4	24.9	37.0	92,600	42	102,900	46.7
1	24	3	30.0	44.7	110,000	49.9	122,200	55.4
1-1/8	28	3-1/2	40.7	60.5	147,000	66.7	163,300	74.1

Size: Diameter and circumference are nominal. A new unused rope in relaxed state will measure larger; loading and use compacts ropes, sets splices and lessens rope size. This is especially prevalent in sizes above 4" diameter. Published nominal sizes from 4-1/8" and larger represent stabilized or preloaded size.


Weights: Published weights of sizes 1-5/8"– 4" diameter are calculated at linear density under stated preload (200d²) plus 4%. For this chart, sizes 4-1/8"–8-1/4" diameter represent un-cycled, (non-stabilized) weights.

Tensile Strengths: Tensile strength determined in accordance with Cordage Institute 1500 Test Methods for Fiber Ropes and ISO 2307.

Technical Information

Specific gravity	1.18*
Melting point	284°F (140°C)
Critical temp.	150°F (65°C)
Coefficient of friction	0.12–0.15*
Elongation at break	3%–4%
Fiber water absorption	<0.1%
UV resistance	good
Wet abrasion	superior
Dry abrasion	superior

* value based on data supplied by the fiber manufacturer for new, dry fiber

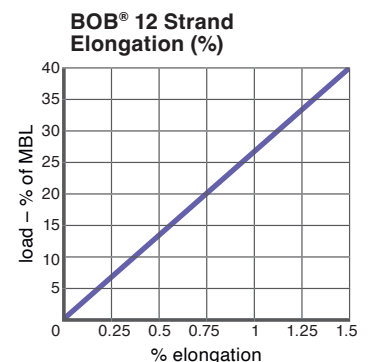

BOB[®] 12 Strand

Rope Specifications

Minimum Tensile Strength Minimum tensile strengths shown are for new (unused) rope and will decrease after use. All tests are performed in accordance with Cordage Institute Standard CI 1500-2. The rope strength will be reduced after use due to heat, abrasion, ultraviolet or chemical exposure. The tensile strengths may be further reduced by up to 50% as a result of knots or kinks. Minimum tensile strengths are defined as two standard deviations (typical about 10%) below the average.

Maximum Working Loads Maximum working loads are determined by dividing the tensile strength by the safety factor. The safety factor is a function of the physical properties of the rope, the age and history of the rope, the type of service it will be subjected to and the risks involved if failure occurs. For a rope manufacturer to give blanket working load recommendations would be like a car manufacturer giving the “safe driving speed” of their cars. Obviously the conditions of use far outweigh the design characteristics of the rope. Typically safety factors vary from 3:1 (for new rope used in applications with uniform loading and where failure would cause little or no risk to equipment or personnel) to 20:1 (for conditions involving moderate shock loading, possibility of snags or kinks or where failure could cause severe risk to equipment or personnel).

Rope Weights Rope weights shown are average and may vary plus or minus 5%.

Working Elongation Working elongation is shown from a preload tension of 200 times the diameter squared per the Cordage Institute Standard.

Special Requirements

Factory Splicing Various types are available for all of our ropes. Splices can be provided with various types of chafe protection or coatings.

Custom Lengths Special constructions are available on request.

Rope Terminations Cortland can provide custom terminations such as thimbles, links, rings and custom hardware. Terminations are available in plastic, bronze, stainless steel and galvanized steel. Please call, or email your requirements to cortland@cortlandcompany.com for a quotation.

Special Coatings Coatings such as polyurethane, polyethylene and vinyl esters may be applied to any of the synthetic ropes to improve snag resistance, sunlight resistance or for color coding. Cortland can provide ropes with a variety of finishes to meet your needs.

Commercial and Military Specifications Certificates of compliance are supplied at no charge if requested when placing the order. Certified test reports can be provided at an additional charge when requested at the time of the order.